





Insulated Steel Doors


Steel Insulated Entry Door – 20 distinct patterns




Flush
W100

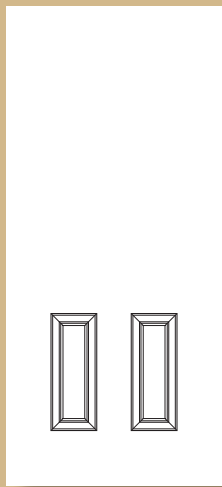


2 Panel Classic
W200

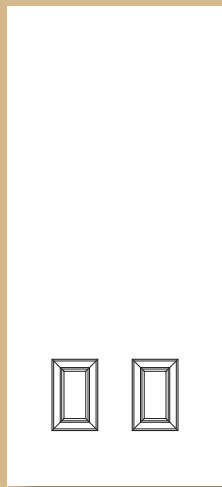


2 Small Panel Classic
W2100

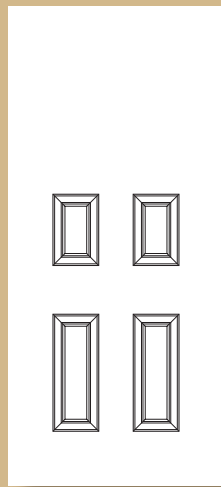


2 + 2 Panel Classic
W2200

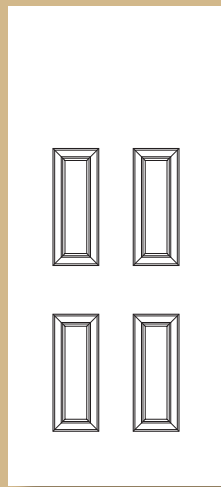


4 Panel Classic
W400

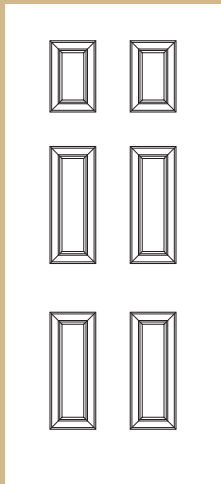


6 Panel Classic
W600

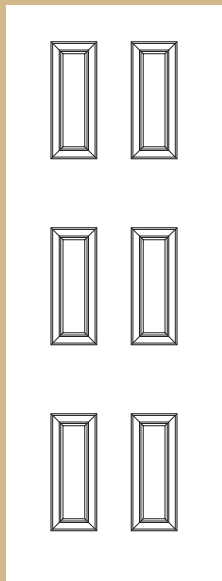


6 Equal Panel Classic
W660

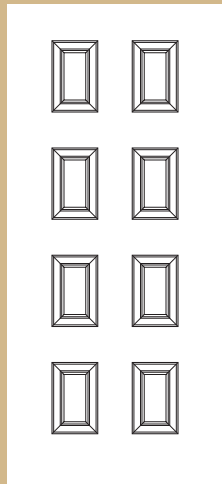


8 Panel Classic
W800

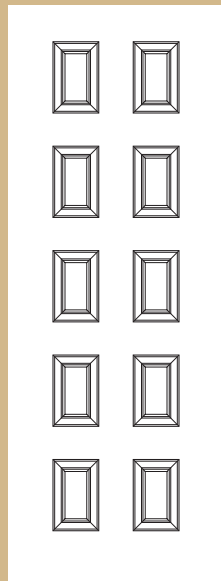


10 Panel Classic
W1000

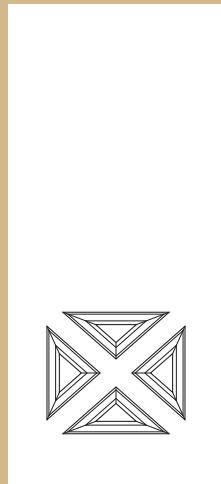


Cross Buck Americana
WXB1

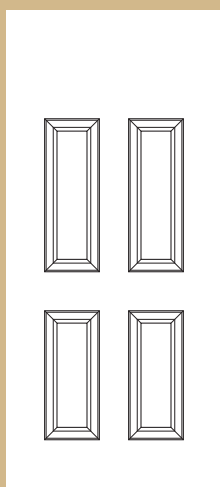


4 Panel BT Americana
WA400

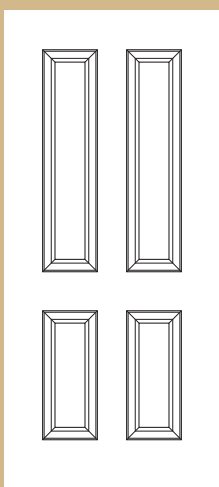


4 Panel Americana
WA4400

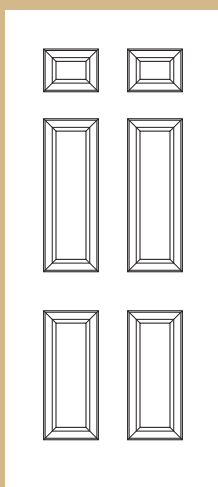


6 Panel Americana
WA600

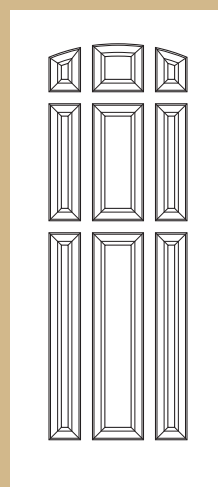


9 Panel Americana
WA900

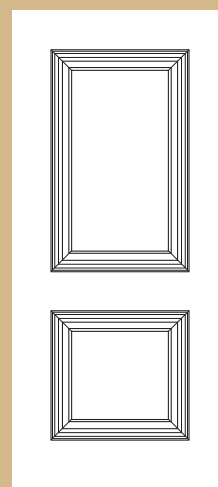


2 Panel HD Square Top
WHD200

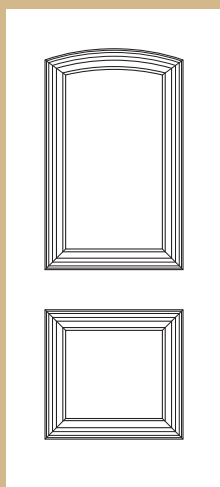


2 Panel HD Soft Arch
WHD2SAS

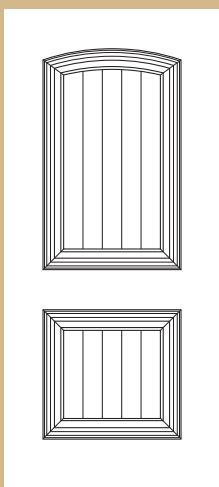


2 Panel HD Plank
WHD2SAP
* see back cover

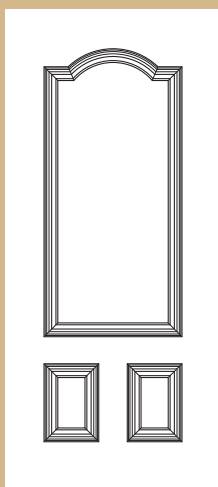

3 Panel HD
WHD300

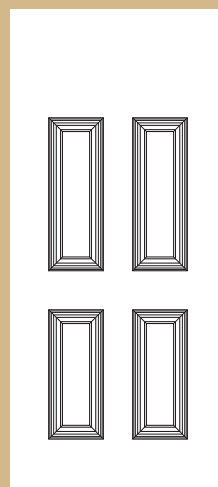

4 Panel HD
WHD400

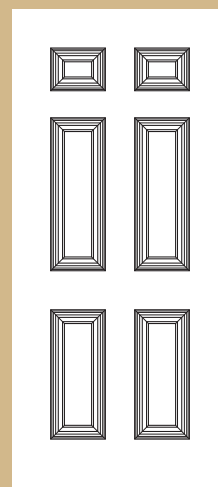

6 Panel HD
WHD600

Lynden Door Sizing Chart — Specializing in CUSTOM SIZES

Flush	Classic								Americana					High Def (HD)						
	2 Panel	2 Small Panel	2 + 2 Panel	4 Panel	6 Panel	6 Equal Panel	8 Panel	10 Panel	Cross Buck	4 Panel BT	4 Panel	6 Panel	9 Panel	2 Panel Square Top	2 Panel Soft Arch	2 Panel Plank	3 Panel	4 Panel	6 Panel	
Sidelite Width																				
0'10"	*																			
1'0"	*	*	*	*	*	*	*	*		*	*	*						*	*	
1'2"	*	*	*	*	*	*	*	*		*	*	*						*	*	
1'4"	*	*	*	*	*	*	*	*		*	*	*						*	*	
1'6"	*	*	*	*	*	*	*	*		*	*	*						*	*	
1'8"	*	*	*	*	*	*	*	*		*	*	*						*	*	
Regular Door Width																				
1'10"	*																			
2'0"	*	*	*	*	*	*	*	*												
2'2"	*	*	*	*	*	*	*	*				*								
2'4"	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
2'6"	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
2'8"	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
2'10"	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
3'0"	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Large Door Width																				
3'2"	*	*	*	*	*	*	*	*												
3'4"	*	*	*	*	*	*	*	*												
3'6"	*	*	*	*	*	*	*	*												
3'8"	*																			
3'10"	*																			
4'0"	*																			
Sidelite and Door Height																				
2'0"	*																			
3'0"	*	*	*																	
4'0"	*	*	*	*																
5'0"	*	*	*	*	*															
6'0"	*	*	*	*	*	*		*		*										
6'2"	*	*	*	*	*	*		*		*										
6'4"	*	*	*	*	*	*		*	*	*	*	*	*	*	*	*	*	*	*	*
6'6"	*	*	*	*	*	*		*	*	*	*	*	*	*	*	*	*	*	*	*
6'8"	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
6'10"	*	*	*	*	*	*	*	*				*								
7'0"	*	*	*	*	*	*	*	*				*								
7'2"	*	*	*	*	*	*	*	*				*								
7'4"	*	*	*	*	*	*	*	*				*								
7'6"	*	*	*	*	*	*	*	*				*								
7'8"	*	*	*	*	*	*	*	*				*								
7'10"	*	*	*	*	*	*	*	*				*								
8'0"	*	*	*	*	*	*	*	*				*								

Lynden Door manufactures CUSTOM SIZED STEEL DOORS (1/16" increments) within sizes noted above

Lynden Door offers a complete line of doors in 3 designer profiles

Classic Series Profile

Americana Series Profile

High Def (HD) Series Profile



Give us an opening – we will give you the perfect solution.

Professional Grade Doors – Sold By Door Professionals

Lynden Doors are manufactured according to the highest standards of quality and are certified by Quality Auditing Institute for energy performance with a U-value of 0.83 W/m²*K (0.15 = Btu/hr*ft²*F).

Lynden Door offers a full line of fire-rated doors certified by Warnock Hersey as a listed 20 minute rated fire door (UL10C). Contact your Lynden Door representative for information on fire rated doors.

Energy Conservation

- Your door is a key component in your entrance system, including quality fitted frame, threshold and weatherstripping. All Lynden Door 1 3/4" door slabs are rated R12.

Thermal Performance

- Wide wood stiles and rails separate the steel skins and provide a thermal break to virtually eliminate condensation and heat transfer even in severe weather conditions.

Health

- Lynden Doors are a healthful choice. We use all no added urea formaldehyde (NAUF) components.

Durability

- Lynden Door offers the thickest insulated steel door skins available. 0.0220" true 24 gauge steel skins provide better resistance to dents and warping.
- Hot dipped galvanized steel and a baked-on high quality polyester primer provide an excellent surface for all finish coat applications.
- Durability ranks first among Green Building Attributes.

Security

- Our 16" internal lock-block allows for added security – a rugged platform for mounting deadbolts and hardware.
- ProTek® Security Stiles are available as an optional upgrade on all our doors. Exceptional strength and protection (see sidebar).

Limited Warranty

- Lynden Door Canada warrants that, from the date of installation, (a) the door will be free of manufacturing defects in material and workmanship for a period of ten (10) years; and (b) our steel doors will not warp, crack or buckle under normal use during the period of the warranty (for full terms and conditions, please refer to warranty document available from your Lynden Door distributor or online at www.lyndendoorcanada.com).



Ask your distributor about glazing options.

See your Lynden Door distributor for a full selection of high performance: frames, thresholds, door sweeps, weatherstripping, lite inserts, transoms, hardware and casings.

Lynden Door designs may be customized with a wide variety of lites from conventional single units to the stunning beauty of leaded and beveled glass.



ProTek®
SECURITY DOOR

PREVENTION = PROTECTION

The ProTek® Security Door features superior strength and security:

- Laminated full length 4 1/2" wide security latch stile
- Laminated hinge stile
- Reinforced corners and laminated top and bottom rails
- All patterns and sizes available
- Custom sizes for replacement doors
- The difficulty and time required to break in through a ProTek® door discourages forced entry
- Warnock Hersey Tested

ProTek® Doors have **met the highest requirements** of the standard for Door Impact Resistance (Door Impact Test ASTM-F476 – Standard Test Method for Security of Swinging Doors)

ProTek® – The same beautiful exterior with a heavily fortified interior

Lynden Door Canada Inc.

4338 Stewart Road
Chilliwack, BC V2R 5G2

Phone: 604.823.4155

Toll Free: 877.823.DOOR (3667)

Fax: 604.823.4180

www.lyndendoorcanada.com

info@lyndendoorcanada.com

Printed door colours shown in this brochure may vary from actual doors. To assure colour accuracy, please request a material sample.

Lynden Door products are highly durable and perform a useful service over a long life cycle. All Lynden Door product literature is available online at www.lyndendoorcanada.com in PDF form. We encourage you to pass this booklet to others who may find it useful.



Matching Wood Interior Doors

Most Lynden Door Canada distributors also carry Lynden Door *wood interior doors*. Our molded door products offer close matches to your steel door selections and the same great Lynden Door **Quality, Value** and **Service**. Shown at left is the *Casha*, a close replica of the 2 Panel HD Plank steel insulated door seen on the cover of this brochure.

Dealer information:

©2009 Lynden Door Canada Inc. All rights reserved.

Printed in Canada